

BK-G6 and BK-G6T

Compact residential
diaphragm gas meters,
cyclic volume 2 dm³



Applications

Media: Natural gas, town gas, propane, butane air. ...*
Industry: Gas supply
Tasks: Gas measurement at operating conditions ...**

Brief information

The residential diaphragm gas meter BK-G6 meet the highest demands with respect to accuracy of measurement and safety. It incorporates both innovative features and gas measurement know-how of many decades. The BK-G6 is supplied in folded form as co-axial and two-pipe version.

The stroke of the diaphragms is pneumatically stopped and therefore ensures both low bearing loads and a quiet operation.

The synthetic diaphragm is dimensionally stable and stadium shaped.

High-grade materials and components as well as the patented curve K-system ensure a high quality standard.

The K-System perfectly coordinates the movement of the valves with the actual gas flow to the measuring chambers. This ensures excellent linearity even with utilizing small valves.

Due to the optimised slides, Q_{min} of BK-G6 is stable and the gas meter is not susceptible to contamination (RPF 0.9 to BS4161). The measuring unit is adjusted by a patented needle-and-scale system.

Although the design of the BK-G6 is very robust, the gas meters are still measuring instruments and as such should be handled with care.

Operating principle

Four measuring chambers are separated by synthetic diaphragms. The chambers are filled and emptied periodically, and the movement of the diaphragms is transferred via a gear to the crankshaft. This shaft moves the valves, which control the gas flow. The rotations of the gear are transferred via a magnetic coupling to the index.

The temperature compensation facility of the BK-G6T ensures via a bimetallic element that the stroke of the diaphragms is adapted to the current gas temperature.


* ... Other media: Inert gases to EN 437

** ... BK-G6T: Measurement of temperature-compensated gas volume

Main features

- MID conformity approved by PTB
- Approved to EN 1359 by German DVGW
- EU approval by German PTB
- Flow rates from 0.06 m³/h to 10 m³/h
- Cyclic volume 2 liters
- Maximum working pressure 0.5 bar
- Firesafe (HTB) up to 0.1 bar according to EN 1359
- High accuracy and long-term stability
- Powder coated pale grey to RAL 7035
- Standard pulse magnet; retrofitable LF pulser (I=0.01 m³/pulse)
- Not susceptible to contamination (RPF = 0.9)
- Temperature ranges on request
- Temperature compensation available
- Intelligent index technology, Chekker system, Absolute-ENCODER and radio applications


Dimensions and weights

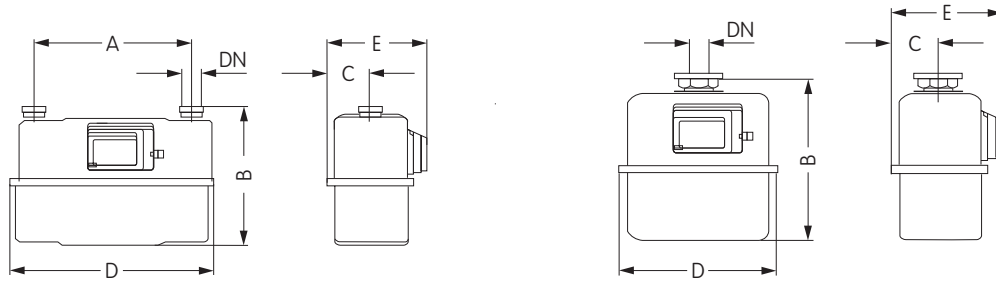


Type	Dimensions** [mm]					Connection size [DN] *	Thread	Weight [kg]
	A	B	C	D	E			
Two-pipe	152.4	262	71	226	163	-	1" (BS 746)	3.0
Two-pipe	152.4	252	71	226	163	25	1 1/4"	3.0
Two-pipe	250	250	71	327	163	20	1"	3.5
Two-pipe	250	241	71	327	163	25	1 1/4"	3.5
Co-axial	-	251	71	226	163	25	2"	3.0

* To DIN 3376 Additional connection dimensions on request

Error curve

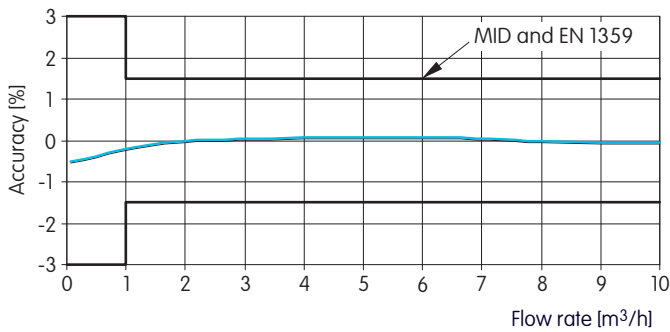


With calibration error limits at test room temperature

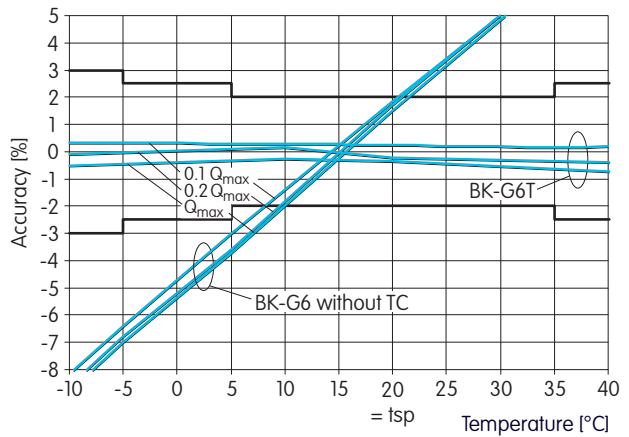

For BK-G6T within the compensation range with error limits to EN 1359:1998/A1:2006, Annex B

Pressure drop curve

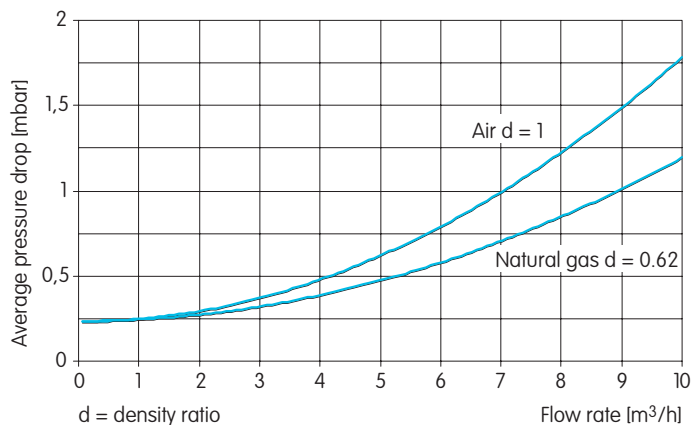

Your contacts



DMS Metering Solutions
 X-Cel House
 Chrysalis Way
 Langley Bridge
 Eastwood
 NG16 3RY

BK G6 V2 EN05
 A13.12.2012

Tel.: 01773 534555
 Fax: 01773 534666
 Email: sales@dmsltd.com
 Web: www.dmsltd.com

73030004

Copyright 2012 Elster GmbH
 All rights reserved.
 Subject to change without prior notice